

**CONIMED**

---

**Model DI – 4  
Inductive Voltage Divider**

**Features and Specifications:**

Model DI-4 is a two stages high accuracy inductive voltage divider that accepts input voltage up to 600 V @ 60 Hz. Double screen is included between primary and secondary windings. A 50 Hz version is also available.

The following voltage ratios are easily selectable:

60 - 120 - 240 - 600 V / 6 V

Local and Remote (GPIB) ratio selection is included.




Ratio error:  $\pm 3$  ppm

Phase error:  $\pm 5$   $\mu$ radian

Max. load: 1 M $\Omega$  - 1 000 pF

Calibration frequency: 60 Hz

**Rear Panel of DI-4:**

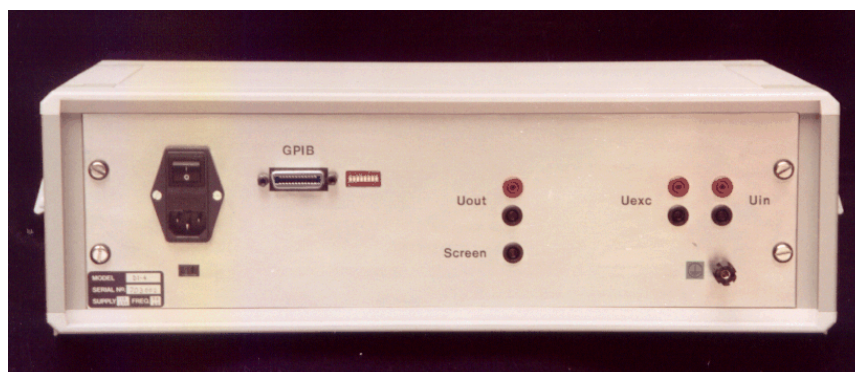

---

**CONIMED S.A.**

Cantilo 1620 - (1676) Santos Lugares - Pcia. de Buenos Aires - Argentina

Tel: ++54 11 4757 0383 - Fax: ++54 11 4859 6200

E-Mail: sales @ conimed.com

Website: [www.conimed.com](http://www.conimed.com)